





PRODUCT FEATURES

- · ZigBee rotary dimmer
- 2-wire
- 5W 250W LED
- Rotary and push dimming
- · Nemko certified
- Trailing edge
- Overload protection

- Short circuit protection
- Surge protection
- Overheat protection
- External momentary switch
- · Min. dim level adjustable
- Max dim level auto-calibration

| DD1 | וחר | ICT. | DATA | |
|-----|-----|----------|------|--|
| rnv | | ' | DAIA | |

| Colour | White RAL 9003 |
|--------------------------------------|----------------|
| Min. and max ambient humidity (RH%) | 10 to 85% |
| Ambient temperature range in storage | -30 to 70°C |
| Ambient temperature range in use | 5 to 40°C |

STANDARDS

| Certification | RoHS, Reach |
|---------------|-------------|
| EN Standards | CE, Nemko |
| IP Code | IP21 |

WARRANTY

Warranty international 2 years

HEATIT ZIG DIM 250W WHITE RAL 9003

Zigbee rotary dimmer

Art.no 1444420

GTIN 7071236016915

Heatit Zig Dim is a ZigBee rotary dimmer for many different types of light fixtures. The dimmer works on most low loads without causing flickering. Heatit Zig Dim is very well suited for LED.

The dimmer is equipped with an external momentary switch option. This allows you to dim and turn on/off the light.

The dimmer fits in European wall boxes and can be used with most frames that are adapted to System 55.

IOT / SMART HOME SPECIFIC DATA

| Alternate IoT-communication protocols | ZigBee 3.0 |
|---------------------------------------|------------|
| Min radio frequency range | 40m |
| Over The Air update (OTA) | Yes |

ELECTRO TECHNICAL DATA

| Voltage | 230VAC 50Hz |
|-----------------------------------|---------------------------|
| Power | 5 to 250W |
| Method of regulation | Push and Rotary Dimming |
| Connection type | Screw clamps |
| Connection terminals diameter | 0.2 to 2.5mm ² |
| Max tightening torque connections | 2N·m |
| Voltage Output | 230VAC 50Hz |

















| PRODUCT | DIMENSIONS |
|----------------|------------|
|----------------|------------|

| Product height/diameter | 70mm | Product Width | 90mm |
|-------------------------|------|--------------------|------|
| Product length | 94mm | Product net weight | 139g |

MAINTENANCE

The device is maintenance-free. Indoor use only

ADDITIONAL INFORMATION

Dimming may be challenging, and we recommend checking the compatibility of different light sources before installation.

When connecting low loads it is recommended to use a bypass.

Working frequency 2.4GHz. Max output power 12,49dBm. The distance between user and products should be no less than 20 cm.

PRODUCT INFO RETURN AND RECYCLING

The product must be recycled as electronic waste.

DISCLAIMER

We develop and design our products according in accordance with our strict quality requirements (ISO 9001) and environmental requirements (ISO 14001).

All electrical installations must be carried out by an authorized electrical installer. The product must be installed in accordance with our installers manual and national building codes. Any wrongful installation, misuse, damage of the product, is not covered under warranty.

Updated documentation is available at www.heatit.com and/or documents.heatit.com Heatit Controls AB can not be held liable for any type of errors or omittances in our product information. Product specifications may change without further notice.














DATA SHEET



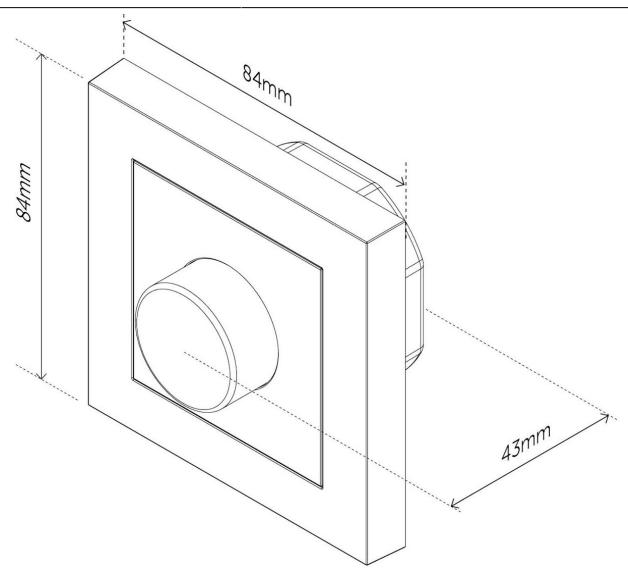

Heatit Zig Dim 250W White RAL 9003 can be ordered from www.heatit.com/1444420

All additional documentation are available on the above adress and on documents.heatit.com/1444420











